

BLSD.010101.000 ГЧ

Перв. примен.

Спроб. №


Подп. и дата

Изм. № дубл.



Взам. изм. №

Подп. и дата

Изм. № подл.

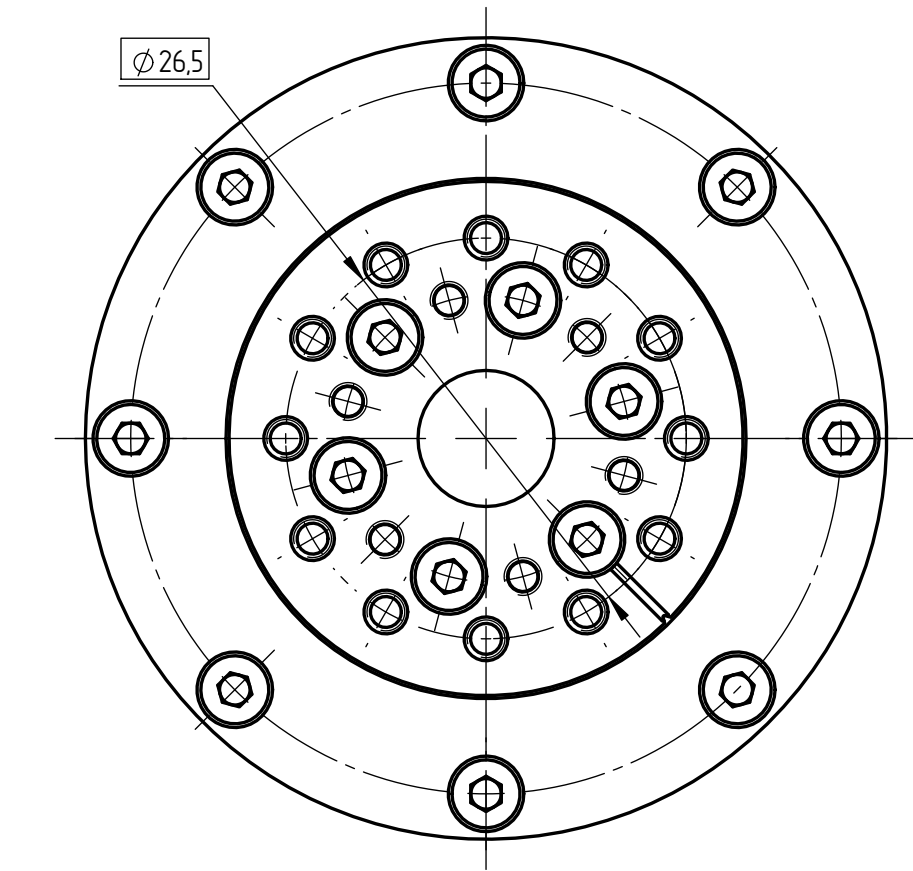


A  
(wires are not shown)

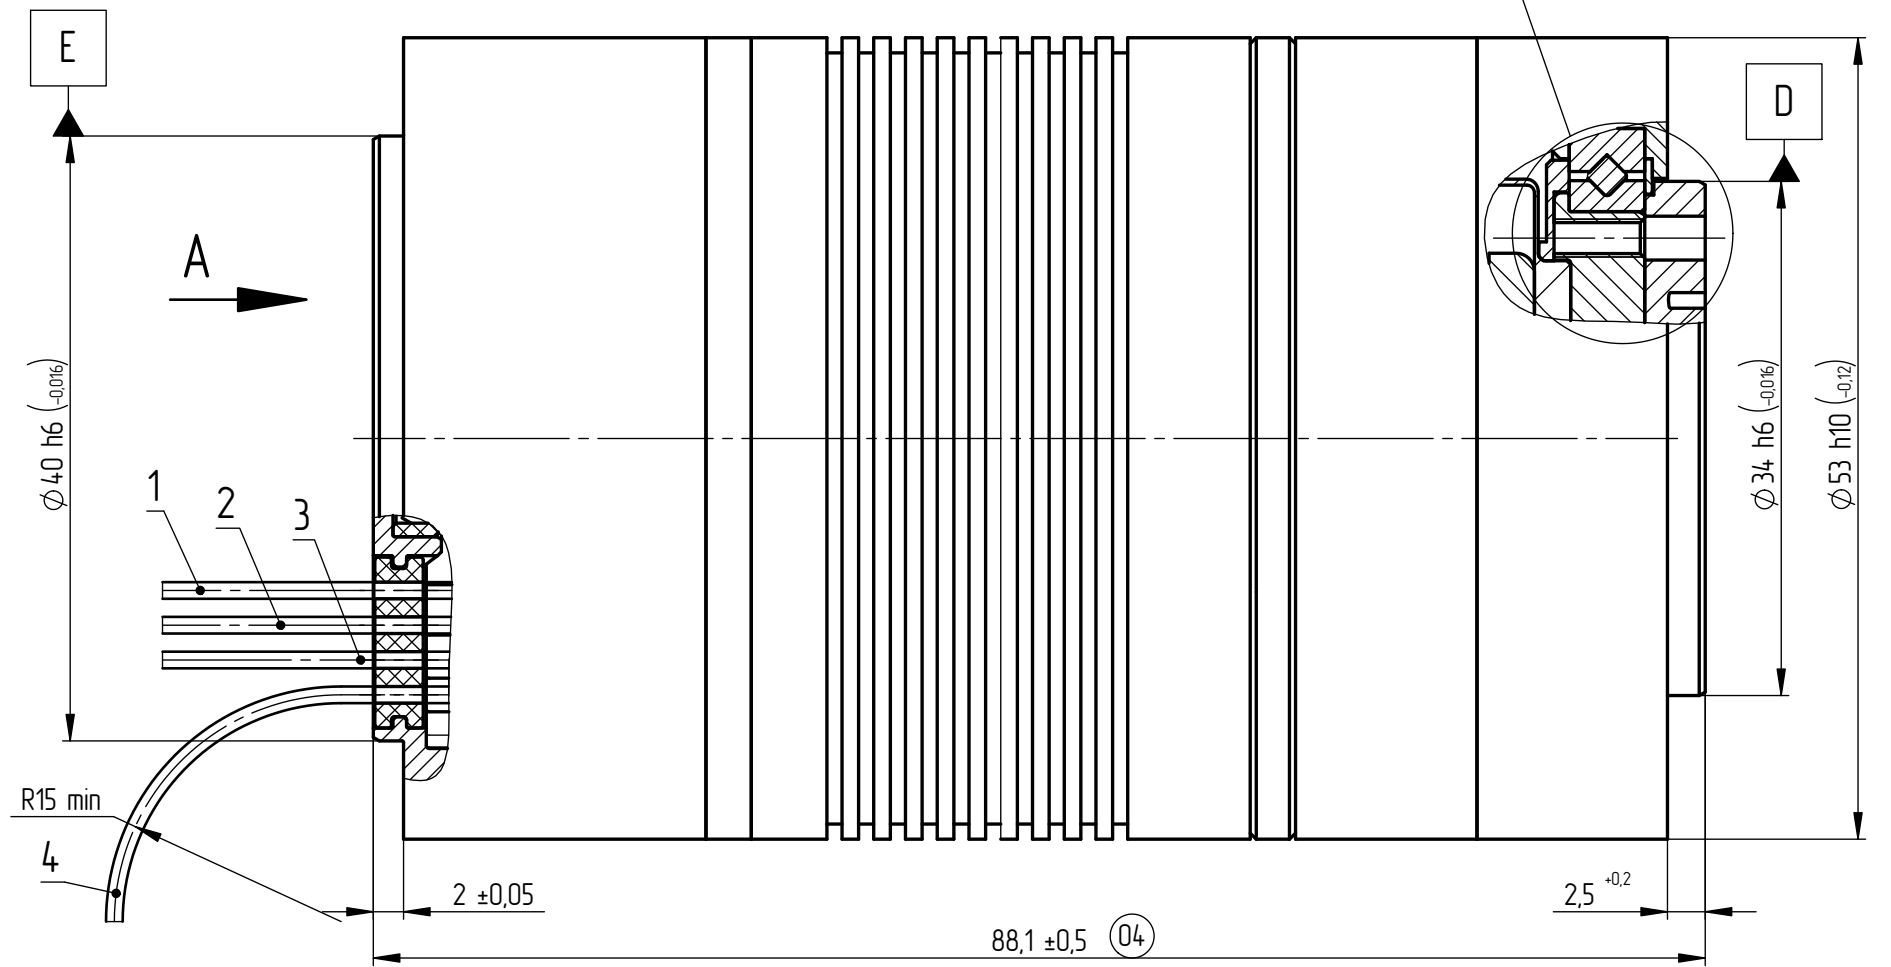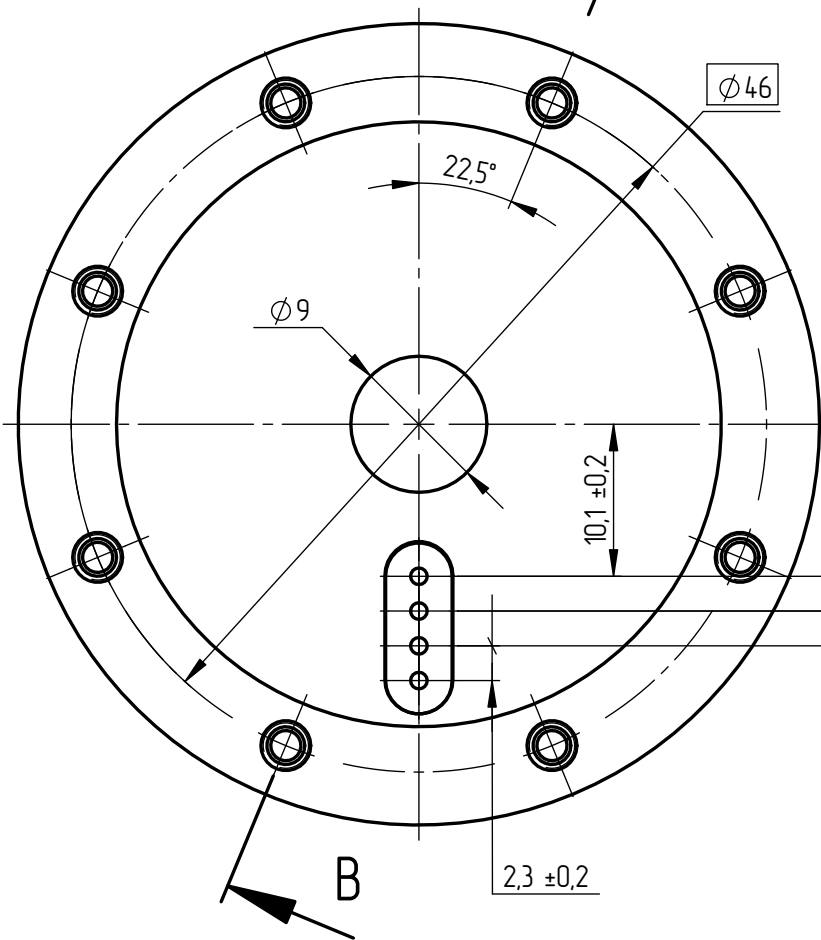

8 Holes M3x0,5-6H  
Tightening torque 2,6 Nm max


⊕ R0,2 E

B-B



12 Holes M2,5x0,45-6H  
Tightening torque 1,4 Nm max

⊕ R0,2 D



Metal-to-metal contacts between fasteners and mounting threaded holes function as PE

Pos. of lead	Color	Signal	Min. length, mm.
1	Red	48v AWG23	150
2	Black	Ground AWG23	
3	Brown	CAN+ AWG26	
4	Blue	CAN- AWG26	

Rev.	Sheet	Document №	Signature	Date
04				
Designed by	Rabtsevich			04.02.19
Checked by	T. check			
Norm.check				
Appr. by				

BLSD.010101.000 ГЧ

Servomotor RDrive 50  
Confirmation drawing

Letter	Weight	Scale
	0.6	2:1
Sheet	of sheets	

